

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : A61F 13/15	A1	(11) International Publication Number: WO 00/37010 (43) International Publication Date: 29 June 2000 (29.06.00)
(21) International Application Number: PCT/US99/29706 (22) International Filing Date: 15 December 1999 (15.12.99) (30) Priority Data: 09/216,545 18 December 1998 (18.12.98) US (71) Applicant: KIMBERLY-CLARK WORLDWIDE, INC. [US/US]; 401 N. Lake Street, Neenah, WI 54956 (US). (72) Inventors: ROESSLER, Thomas, Harold; 1034 Greendale Court, Menasha, WI 54952 (US). SUPRISE, Jody, Dorothy; W3151 Archer Court, Pine River, WI 54965 (US). VOGT, Robert, Eugene; 1121 Gay Drive, Neenah, WI 54956 (US). BLENKE, Timothy, James; 916 Millbrook Drive, Neenah, WI 54956 (US). (74) Agents: CURTIN, Jeffrey, B. et al.; Kimberly-Clark World-wide, Inc., 401 N. Lake Street, Neenah, WI 54956 (US).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: **PANT-LIKE DISPOSABLE ABSORBENT ARTICLES WITH AN EASY OPENING FEATURE**

(57) Abstract

A pant-like, refastenable, disposable absorbent article (20) includes an absorbent chassis (28) and a pair of opposed side panels (48). The absorbent chassis defines a pair of laterally opposed side edges (30) and a pair of longitudinally opposed waist edges (32). The side panels (48) extend between the side edges (30) of the absorbent chassis to define a waist opening and a pair of leg openings in the pant-like disposable absorbent article (20). Each of the opposed side panels (48) defines a first side margin (52) which is permanently attached to the side edge (30) of the absorbent chassis in a back waist region (24) of the absorbent article to provide a permanent joint (76). Each of the opposed side panels further defines a second side margin (50) opposite the first side margin (52) which is refastenably attached to the side edge of the absorbent chassis in the front waist region of the absorbent article to provide a refastenable joint (78).

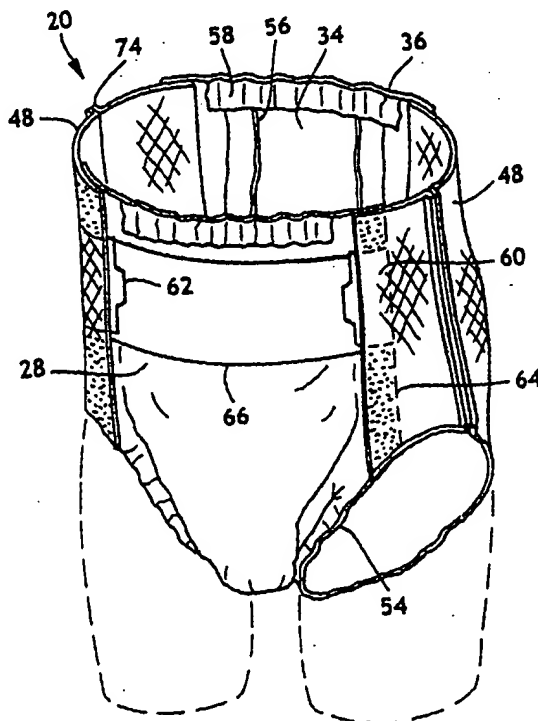

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

PANT-LIKE DISPOSABLE ABSORBENT ARTICLES WITH AN EASY OPENING FEATURE

Field of the Invention

The present invention relates to disposable absorbent articles which are adapted to contain body exudates. More particularly, the present invention relates to pant-like
5 disposable absorbent articles having an easy opening feature and methods of making the same.

Background of the Invention

- 10 It is desired that absorbent articles such as diapers, training pants or incontinence garments provide a close, comfortable fit about the wearer and contain body exudates. Moreover, it is desirable that such absorbent articles, after being soiled, can be removed from the wearer in a convenient and clean manner without undesirably soiling the care
15 giver or surrounding area such as the clothes of the wearer. In certain circumstances, it is also desirable that such absorbent articles are capable of being pulled up or down over the hips of the wearer to allow the wearer or caregiver to easily pull the article on and easily remove the article if it has not been soiled. For example, such absorbent articles can assist in the toilet training of children.
- 20 Conventional diapers have typically included a front waist portion and a back waist portion which are releasably connected about the hips of the wearer during use by conventional fasteners such as adhesive tape fasteners or hook and loop type fasteners. For example, the conventional fasteners have typically included a pair of fasteners, such as adhesive
25 tape tabs, located on the outermost corners of the diaper in the back waist region of the diaper and a complimentary fastener, such as a taping panel, located on the outer surface of the outer cover of the diaper in the front waist portion of the diaper. In such a configuration, the diaper has been positioned between the legs of the wearer while the wearer is lying down and the adhesive tape tabs have been releasably attached to the
30 taping panel to secure the back waist portion to the front waist portion of the diaper to secure the diaper about the waist of the wearer. Such conventional diapers are easy to fasten about and remove from the wearer after use without undesirably soiling the care giver. However, such conventional diapers are not provided in a pant-like, prefastened

configuration and, thus, are not configured to be pulled up or down over the hips of the wearer when the fasteners are attached.

Several attempts have been made to provide absorbent articles which effectively contain
5 body exudates, are capable of being pulled up or down over the hips of the wearer and
provide ease of cleaning and removal after being soiled. For example, some conventional
absorbent articles, such as conventional training pants, have included integral side panels
which connect the front waist portion to the back waist portion of the absorbent article.
The side panels have been made stretchable such that the waist opening of the absorbent
10 article can expand to allow the absorbent article to be pulled up or down over the hips of
the wearer if desired. Such side panels have also been designed such that they may be
torn to remove the training pant from the wearer after it has been soiled.

However, many of such attempts have not been completely satisfactory. For example,
15 absorbent articles such as training pants have not always been able to achieve a close
conforming fit to the wearer while still being able to expand enough to be pulled up and
down over the hips of the wearer. Often such training pants fit the waist of the wearer
loosely which can undesirably result in leaks. As a result, many of such articles have not
contained bodily exudates as effectively as conventional diaper-type articles which can be
20 adjusted to achieve a more conforming fit to the wearer. Moreover, the inspection and
removal of soiled absorbent articles which have integral side panels, such as conventional
training pants, have not always been completely satisfactory. For example, the side
panels have been difficult to tear when attempting to remove the article from the waist of
the wearer instead of pulling the article down over the hips of the wearer.

25 Accordingly, despite the attempts to develop improved absorbent articles, there remains a
need for absorbent articles which can provide the benefits of both conventional training
pants and conventional diapers. That is, there remains a need for absorbent articles
which conform to the wearer to effectively contain bodily exudates, which are capable of
30 being pulled up and down over the hips and buttocks of the wearer without opening, which
are readily secured about and removed from the wearer in a convenient and clean
manner and which allow easy inspection by the care giver to assist in determining whether
the article is soiled. Moreover, there is a need for improved methods of reliably and
consistently making such pant-like disposable absorbent articles.

35

Summary of the Invention

In response to the difficulties and problems discussed above, new pant-like disposable absorbent articles which have an easy opening feature and methods of making the same have been discovered. In one aspect, the present invention concerns a pant-like, refastenable, disposable absorbent article which defines a front waist region, a back waist region, a crotch region which extends between and connects the waist regions, a longitudinal direction and a lateral direction. The absorbent article includes an absorbent chassis which defines an exterior surface, an interior surface opposite the exterior surface, a pair of laterally opposed side edges and a pair of longitudinally opposed waist edges. The absorbent article also includes a pair of opposed side panels which extend outward from and between the side edges of the absorbent chassis in the front waist region and back waist region of the absorbent article to define a waist opening and a pair of leg openings in the pant-like disposable absorbent article. Each of the opposed side panels defines a first side margin which is permanently attached to the side edge of the absorbent chassis in one of the front waist region or the back waist region of the absorbent article to provide a permanent joint and a second side margin which is refastenably attached to the side edge of the absorbent chassis in the other waist region of the absorbent article to provide a refastenable joint.

20

In another aspect, the present invention concerns a pant-like, refastenable, disposable absorbent article which defines a front waist region, a back waist region, a crotch region which extends between and connects the waist regions, a longitudinal direction and a lateral direction. The absorbent article includes an absorbent chassis, a pair of opposed back panels and a pair of opposed front panels. The absorbent chassis defines an exterior surface, an interior surface opposite the exterior surface, a pair of laterally opposed side edges and a pair of longitudinally opposed waist edges. The opposed back panels are permanently attached to the side edge of the absorbent chassis in the back waist region of the absorbent article. The opposed front panels are refastenably attached to the side edge of the absorbent chassis in the front waist region of the absorbent article to provide a refastenable joint. The front panel and back panel on each side edge of the absorbent chassis extend laterally outward from the absorbent chassis and are connected together along a side seam to define a waist opening and a pair of leg openings and provide the pant-like, refastenable, disposable absorbent article.

35

In yet another aspect, the present invention concerns a pant-like, refastenable, disposable absorbent article which defines a front waist region, a back waist region, a crotch region which extends between and connects the waist regions, an absorbent chassis which defines a pair of opposed side edges and a pair of opposed waist edges. The pant-like, disposable absorbent article is made by a process which includes:

- a) providing a continuous web of interconnected absorbent chassis;
- b) permanently attaching a pair of laterally opposed back panels to the side edges of each of the absorbent chassis in one of the front waist region or the back waist region to provide a permanent joint;
- 10 c) refastenably attaching a pair of laterally opposed front panels to the side edges of each of the absorbent chassis in the opposite waist region of the absorbent article to provide a refastenable joint;
- d) selectively cutting the continuous web of interconnected absorbent chassis into discrete absorbent articles;
- 15 e) folding each of the discrete absorbent articles about a fold line extending in a lateral direction through the crotch region of the article thereby positioning the front panels and the back panels in a facing relationship; and
- f) connecting the front panels and the back panels together along a pair of laterally opposed side seams to define a waist opening and a pair of leg openings and provide the pant-like, refastenable, disposable absorbent article.
- 20

The present invention advantageously provides pant-like, refastenable disposable absorbent articles which include an easy opening feature and methods of making the same. In particular, the present invention provides pant-like disposable absorbent articles which are capable of being reliably pulled up or down over the hips of the wearer to assist in the toilet training of the wearer similar to conventional training pants. Moreover, similar to conventional diapers, the pant-like disposable absorbent articles of the present invention can advantageously be applied to and removed from the wearer similar to conventional diapers after they have been soiled with relative ease and cleanliness.

30 Further, the pant-like disposable absorbent articles of the present invention allow easy inspection by the care giver to assist in determining whether the article is soiled similar to conventional diapers.

Brief Description of the Drawings

The present invention will be more fully understood and further advantages will become apparent when reference is made to the following detailed description of the invention and the accompanying drawings wherein like numerals represent like elements. The drawings are merely representative and are not intended to limit the scope of the appended claims.

Fig. 1 representatively shows a perspective view of an example of a pant-like, refastenable disposable absorbent article of the present invention;

Fig. 2 representatively shows a front plan view of the pant-like, refastenable disposable absorbent article of Fig. 1;

Fig. 3 representatively shows a plan view of the disposable absorbent article of Fig. 1 in an unfastened, stretched and laid flat condition with the surface of the article which contacts the wearer's clothing facing the viewer and with portions of the article partially cut away to show the underlying features; and

Fig. 4 representatively shows a schematic view of an example of a method of making pant-like disposable absorbent articles of the present invention.

Detailed Description of the Invention

The present invention concerns pant-like, refastenable, disposable absorbent articles which are adapted to be worn adjacent to the body of a wearer to absorb and contain various exudates discharged from the body and methods of making the same. The pant-like absorbent articles are configured to closely conform to the body of the wearer to effectively contain body exudates while being capable of being pulled up or down over the hips and buttocks of the wearer. The absorbent articles are also refastenable such that they can be secured to and removed directly from the waist of the wearer and easily inspected to determine if they have been soiled during use. As such, the pant-like, refastenable, disposable absorbent articles of the present invention can function in a similar manner to conventional training pants when left in the prefastened, pant-like configuration or they can be unfastened prior to or during use to function in a refastenable manner similar to conventional diapers. As used herein, the term "disposable" refers to

articles which are intended to be discarded after a limited use and which are not intended to be laundered or otherwise restored for reuse.

The pant-like disposable absorbent articles of the present invention will be described in terms of a disposable, pant-like diaper article which is adapted to be worn by infants about the lower torso. In particular, the pant-like disposable absorbent articles will be described in terms of a pant-like, refastenable, disposable diaper having prefastened side panels. It is understood that the articles and methods of the present invention are equally adaptable for other types of absorbent articles such as adult incontinent products, training pants, feminine hygiene products, other personal care or health care garments, and the like.

Fig. 1 representatively illustrates an example of a pant-like, refastenable disposable diaper, as generally indicated at 20, of the present invention. Fig. 2 representatively illustrates a front plan view of the prefastened diaper of Fig. 1. Fig. 3 representatively illustrate the prefastened diaper of Fig. 1 in an unfastened, stretched and laid flat configuration with the surface of the diaper adapted to contact the wearer's clothing facing the viewer and with portions of the diaper partially cut away to show the underlying features. As illustrated in Fig. 3, the diaper 20 defines a front waist region 22, a back waist region 24, a crotch region 26 which extends between and connects the front and back waist regions 22 and 24, a longitudinal direction 38 and a lateral direction 40.

The illustrated diaper 20 includes an absorbent chassis 28 and a pair of laterally opposed side panels 48. The absorbent chassis 28 defines a pair of laterally opposed side edges 30, a pair of longitudinally opposed waist edges 32, an interior surface 34 which is configured to contact the wearer, and an outer surface 36 opposite the interior surface 34 which is configured to contact the wearer's clothing in use. The absorbent chassis 28, as representatively illustrated in Fig. 3, includes an outer cover 42, a bodyside liner 44 which is connected to the outer cover 42 in a superposed relation, and an absorbent core 46 which is located between the outer cover 42 and the bodyside liner 44. The side panels 48 extend laterally outward from and between each opposed side edge 30 of the absorbent chassis 28 of the front and back waist regions 22 and 24.

The front waist region 22 comprises the portion of the diaper 20 which, when worn, is positioned on the front of the wearer while the back waist region 24 comprises the portion of the diaper 20 which, when worn, is positioned on the back of the wearer. The crotch region 26 of the diaper 20 comprises the portion of the diaper 20 which, when worn, is

positioned between the legs of the wearer and covers the lower torso of the wearer. The side panels 48 comprise the portions of the diaper which, when worn, are positioned on the side hip regions of the wearer. The laterally opposed side edges 30 of the absorbent chassis 28 and the side panels 48 of the diaper 20 generally define leg openings which
5 may be curvilinear. The waist edges 32 of the absorbent chassis of the diaper 20 and the side panels 48 are configured to encircle the waist of the wearer when worn and provide a waist opening when fastened which defines a waist perimeter dimension.

The illustrated diaper 20 further includes a prefastened, refastenable fastening system 60.
10 The fastening system 60 includes a pair of primary fasteners 62, one located on each of the side panels 48 of the diaper 20, which are releasably engaged with the absorbent chassis 28 adjacent the opposed side edges 30 of the absorbent chassis 28. The illustrated fastening system 60 further includes releasable bonds 64 adjacent the primary fasteners 62 which assist the primary fasteners in releasably securing the side panels 48
15 to the absorbent chassis 28. The fastening system 60 may further include an attachment panel 66 located on the outer surface of the absorbent chassis 28 to which the primary fasteners 62 are releasably engaged.

The absorbent chassis 28 is configured to contain and/or absorb any body exudates
20 discharged from the wearer. Whereas, the side panels 48 and the prefastened, refastenable fastening system 60 are configured to maintain the diaper 20 about the waist of the wearer and provide a pant-like appearance. The diaper 20 may further include leg elastics 54, containment flaps 56 and waist elastics 58 as are known to those skilled in the art. It should be recognized that individual components of the diaper 20 may be optional
25 depending upon the intended use of the diaper 20.

The diaper 20 may be of various suitable shapes. For example, in the unfastened configuration as illustrated in Fig. 3, the diaper may have an overall rectangular shape, T-shape or an approximately hour-glass shape. In the shown embodiment, the diaper 20
30 has a generally I-shape in an unfastened configuration. Examples of diaper configurations suitable for use in connection with the instant application and other diaper components suitable for use on diapers are described in U.S. Patent 4,798,603 issued January 17, 1989, to Meyer et al.; U.S. 5,176,668 issued January 5, 1993, to Bernardin; U.S. 5,176,672 issued January 5, 1993, to Bruemmer et al.; U.S. 5,192,606 issued
35 March 9, 1993, to Proxmire et al., and U.S. 5,509,915 issued April 23, 1996, to Hanson et al., the disclosures of which are herein incorporated by reference. The various aspects

and configurations of the invention can provide distinctive combinations of softness, body conformity, reduced red-marking of the wearer's skin, reduced skin hydration, improved containment of body exudates and improved aesthetics.

- 5 The various components of the diaper 20 are integrally assembled together employing various types of suitable attachment means, such as adhesive, sonic and thermal bonds or combinations thereof. In the shown embodiment, for example, the outer cover 42 and bodyside liner 44 are assembled to each other and to the absorbent core 46 with adhesive, such as a hot melt, pressure-sensitive adhesive. The adhesive may be applied
10 as a uniform continuous layer of adhesive, a patterned layer of adhesive, a sprayed pattern of adhesive, or an array of separate lines, swirls or dots of adhesive. Similarly, other diaper components, such as the elastic members 54 and 58 and the primary fasteners 62, may be assembled into the diaper 20 article by employing the above-identified attachment mechanisms. Desirably, the majority of the diaper components are
15 assembled together using ultrasonic bonding techniques for reduced manufacturing cost and improved performance.

The outer cover 42 of the absorbent chassis 28 of the diaper 20, as representatively illustrated in Fig. 3, may suitably be composed of a material which is either liquid
20 permeable or liquid impermeable. It is generally preferred that the outer cover 42 be formed from a material which is substantially impermeable to liquids. A typical outer cover can be manufactured from a thin plastic film or other flexible liquid-impermeable material. For example, the outer cover 42 may be formed from a polyethylene film having a thickness of from about 0.013 millimeter (0.5 mil) to about 0.051 millimeter (2.0 mils). If it
25 is desired to present the outer cover 42 with a more clothlike feeling, the outer cover 42 may comprise a polyolefin film having a nonwoven web laminated to the outer surface thereof, such as a spunbond web of polyolefin fibers. For example, a stretch-thinned polypropylene film having a thickness of about 0.015 millimeter (0.6 mil) may have thermally laminated thereto a spunbond web of polypropylene fibers, which fibers have a
30 thickness of about 1.5 to 2.5 denier per filament, which nonwoven web has a basis weight of about 17 grams per square meter (0.5 ounce per square yard). Methods of forming such clothlike outer covers are known to those skilled in the art.

Further, the outer cover 42 may be formed of a woven or nonwoven fibrous web layer
35 which has been totally or partially constructed or treated to impart a desired level of liquid impermeability to selected regions that are adjacent or proximate the absorbent core 46.

Still further, the outer cover 42 may optionally be composed of a micro-porous "breathable" material which permits vapors to escape from the absorbent core 46 while still preventing liquid exudates from passing through the outer cover 42. The outer cover 42 can also be embossed or otherwise provided with a matte finish to provide a more aesthetically pleasing appearance.

The bodyside liner 44, as representatively illustrated in Fig. 3, suitably presents a bodyfacing surface which is compliant, soft feeling, and nonirritating to the wearer's skin. Further, the bodyside liner 44 may be less hydrophilic than the absorbent core 46, to present a relatively dry surface to the wearer, and may be sufficiently porous to be liquid permeable, permitting liquid to readily penetrate through its thickness. A suitable bodyside liner 44 may be manufactured from a wide selection of web materials, such as porous foams, reticulated foams, apertured plastic films, natural fibers (for example, wood or cotton fibers), synthetic fibers (for example, polyester or polypropylene fibers), or a combination of natural and synthetic fibers. The bodyside liner 44 is suitably employed to help isolate the wearer's skin from liquids held in the absorbent core 46.

Various woven and nonwoven fabrics can be used for the bodyside liner 44. For example, the bodyside liner may be composed of a meltblown or spunbonded web of polyolefin fibers. The bodyside liner may also be a bonded-carded web composed of natural and/or synthetic fibers. The bodyside liner may be composed of a substantially hydrophobic material, and the hydrophobic material may, optionally, be treated with a surfactant or otherwise processed to impart a desired level of wettability and hydrophilicity. In a particular embodiment of the present invention, the bodyside liner 44 comprises a nonwoven, spunbond, polypropylene fabric composed of about 2.8-3.2 denier fibers formed into a web having a basis weight of about 20 grams per square meter and a density of about 0.13 gram per cubic centimeter. The fabric may be surface treated with about 0.3 weight percent of a surfactant commercially available from Hodgson Textile Chemicals, Inc. under the trade designation AHCOVEL Base N-62. The surfactant may be applied by any conventional means, such as spraying, printing, brush coating or the like. The surfactant may be applied to the entire bodyside liner 44 or may be selectively applied to particular sections of the bodyside liner 44, such as the medial section along the longitudinal centerline of the diaper, to provide greater wettability of such sections. The bodyside liner 44 may further include a lotion or treatment applied thereto to which is configured to treat or be transferred to the wearer's skin.

The absorbent core 46 of the diaper 20, as representatively illustrated in Fig. 3, may suitably comprise a matrix of hydrophilic fibers, such as a web of cellulosic fluff, mixed with particles of a high-absorbency material commonly known as superabsorbent material. In a particular embodiment, the absorbent core 46 comprises a matrix of cellulosic fluff, such as wood pulp fluff, and superabsorbent hydrogel-forming particles. The wood pulp fluff may be exchanged with synthetic, polymeric, meltblown fibers or with a combination of meltblown fibers and natural fibers. The superabsorbent particles may be substantially homogeneously mixed with the hydrophilic fibers or may be nonuniformly mixed. The fluff and superabsorbent particles may also be selectively placed into desired zones of the absorbent core 46 to better contain and absorb body exudates. The concentration of the superabsorbent particles may also vary through the thickness of the absorbent core 46. Alternatively, the absorbent core 46 may comprise a laminate of fibrous webs and superabsorbent material or other suitable means of maintaining a superabsorbent material in a localized area.

The absorbent core 46 may have any of a number of shapes. For example, the absorbent core may be rectangular, I-shaped, or T-shaped. It is generally preferred that the absorbent core 46 be narrow in the crotch area of the diaper 20. It has been found that the absorbent chassis 28 of the present invention is particularly useful when the width dimension in the crotch region 26 is from about 2.5 to about 12.7 centimeters (1.0 to about 5.0 inches), desirably no more than about 7.6 centimeters (3.0 inches) and more desirably no more than about 5.1 centimeters (2.0 inches). The narrow crotch width dimension of the absorbent chassis 28 allows the absorbent chassis 28 to better fit between the legs of the wearer. The size and the absorbent capacity of the absorbent core 46 should be compatible with the size of the intended wearer and the liquid loading imparted by the intended use of the absorbent article.

The high-absorbency material can be selected from natural, synthetic, and modified natural polymers and materials. The high-absorbency materials can be inorganic materials, such as silica gels, or organic compounds, such as crosslinked polymers. The term "crosslinked" refers to any means for effectively rendering normally water-soluble materials substantially water insoluble but swellable. Such means can include, for example, physical entanglement, crystalline domains, covalent bonds, ionic complexes and associations, hydrophilic associations such as hydrogen bonding, and hydrophobic associations or Van der Waals forces.

Examples of synthetic, polymeric, high-absorbency materials include the alkali metal and ammonium salts of poly(acrylic acid) and poly(methacrylic acid), poly(acrylamides), poly(vinyl ethers), maleic anhydride copolymers with vinyl ethers and alpha-olefins, poly(vinyl pyrrolidone), poly(vinyl morpholinone), poly(vinyl alcohol), and mixtures and
5 copolymers thereof. Further polymers suitable for use in the absorbent core include natural and modified natural polymers, such as hydrolyzed acrylonitrile-grafted starch, acrylic acid grafted starch, methyl cellulose, carboxymethyl cellulose, hydroxypropyl cellulose, and the natural gums, such as alginates, xanthum gum, locust bean gum, and the like. Mixtures of natural and wholly or partially synthetic absorbent polymers can also
10 be useful in the present invention. Such high-absorbency materials are well known to those skilled in the art and are widely commercially available. Examples of superabsorbent polymers suitable for use in the present invention are SANWET IM 3900 polymer available from Hoechst Celanese located in Portsmouth, Virginia and DOW
15 DRYTECH 2035LD polymer available from Dow Chemical Co. located in Midland, Michigan.

The high absorbency material may be in any of a wide variety of geometric forms. As a general rule, it is preferred that the high absorbency material be in the form of discrete particles. However, the high absorbency material may also be in the form of fibers, flakes,
20 rods, spheres, needles, or the like. As a general rule, the high absorbency material is present in the absorbent body in an amount of from about 5 to about 90 weight percent based on total weight of the absorbent core 46.

Optionally, a substantially hydrophilic tissue wrapsheet (not illustrated) may be employed
25 to help maintain the integrity of the airlaid fibrous structure of the absorbent core 46. The tissue wrapsheet is typically placed about the absorbent body over at least the two major facing surfaces thereof and composed of an absorbent cellulosic material, such as creped wadding or a high wet-strength tissue. In one aspect of the invention, the tissue
30 wrapsheet can be configured to provide a wicking layer which helps to rapidly distribute liquid over the mass of absorbent fibers comprising the absorbent body. The wrapsheet material on one side of the absorbent fibrous mass may be bonded to the wrapsheet located on the opposite side of the fibrous mass to effectively entrap the absorbent
core 46.

35 As representatively illustrated in Fig. 1, the absorbent chassis 28 of the disposable diaper 20 may include a pair of containment flaps 56 which are configured to provide a

barrier to the lateral flow of body exudates. The containment flaps 56 may be located along the laterally opposed side edges 30 of the absorbent chassis 28. Each containment flap 56 typically defines an unattached edge which is configured to maintain an upright, perpendicular configuration in at least the crotch region 26 of the diaper 20 to form a seal
5 against the wearer's body. The containment flaps 56 may extend longitudinally along the entire length of the absorbent chassis 28 or may only extend partially along the length of the absorbent chassis 28. When the containment flaps 56 are shorter in length than the absorbent chassis 28, the containment flaps 56 can be selectively positioned anywhere along the side edges 30 of the absorbent chassis 28. In a particular aspect of the
10 invention, the containment flaps 56 extend along the entire length of the absorbent chassis 28 to better contain the body exudates.

Such containment flaps 56 are generally well known to those skilled in the art. For example, suitable constructions and arrangements for containment flaps 56 are described
15 in U.S. Patent 4,704,116 issued November 3, 1987, to K. Enloe the disclosure of which is hereby incorporated by reference.

The disposable diaper 20 of the different aspects of the present invention may further include elastics at the waist edges 32 and side edges 30 of the absorbent chassis 28 of
20 the diaper 20 to further prevent leakage of body exudates and support the absorbent chassis 28. For example, as representatively illustrated in Figs. 1-3, the diaper 20 of the present invention may include a pair of leg elastic members 54 which are connected to the laterally opposed side edges 30 of the absorbent chassis 28 in the crotch region 26 of the diaper 20 and a pair of waist elastic members 58 which are connected to the
25 longitudinally opposed waist edges 32 of the absorbent chassis 28 of the diaper 20. The leg elastics 54 and waist elastics 58 are generally adapted to fit about the legs and waist of a wearer in use to maintain a positive, contacting relationship with the wearer to effectively reduce or eliminate the leakage of body exudates from the diaper 20.

30 Materials suitable for use as the leg elastics 54 and waist elastics 58 are well known to those skilled in the art. Exemplary of such materials are sheets or strands or ribbons of a polymeric, elastomeric material which are adhered to the outer cover 42 in a stretched position, or which are attached to the outer cover 42 while the outer cover is pleated, such that elastic constrictive forces are imparted to the outer cover 42. The leg elastics may
35 also include such materials as polyurethane, synthetic and natural rubber.

- As representatively illustrated in Figs. 1-3, the diaper 20 further includes a pair of laterally opposed side panels 48. Each side panel 48 defines a first side margin 50 which is joined to the side edge 30 of the absorbent chassis 28 in the front waist region 22 and a second side margin 52 which is joined to the side edge 30 of the absorbent chassis 28 in the back waist region 24. The illustrated side panels 48 are permanently connected to the side edges 30 of the absorbent chassis 28 in at least one of the waist regions 22 and 24 and releasably attached to the side edges 30 of the absorbent chassis 28 in the opposite waist region.
- For example, as illustrated in Figs. 1-3, the second side margins 52 of the side panels 48 of the diaper 20 may be permanently secured to and extend laterally beyond the side edges 30 of the diaper 20 in the back waist region 24 of the diaper 20 to provide a permanent joint 76. The side panels 48 are permanently connected to the diaper 20 along permanent joint 76 using attachment means known to those skilled in the art such as adhesive, thermal or ultrasonic bonding. As discussed above, the side panels 48 are desirably permanently connected to the absorbent chassis 28 of the diaper 20 using ultrasonic bonding for improved manufacturing efficiency and reduced raw material cost. In such a configuration, the first side margin 50 of each of the side panels 48 is refastenably attached to the side edges 30 of the absorbent chassis 28 in the front waist region 22 of the diaper 20 to provide a refastenable joint 78 as will be discussed herein in more detail with respect to the description of the fastening system 60. The refastenable joint 78 in such a configuration is located on the front abdominal region of the wearer for easy access to the care giver.
- Alternatively, the side margins of the side panels 48 may be permanently connected to the side edges 30 of the absorbent chassis 28 in the front waist region 22 and refastenably attached to the side edges 30 of the absorbent chassis 28 in the back waist region 24 of the diaper if it is desired that the fasteners be located towards the back of the wearer. Such a configuration may be desirable to prevent a wearer from unfastening the article prematurely.
- Each of the side panels 48 may include one or more individual, distinct pieces of material. For example, in the illustrated embodiments, each side panel 48 includes a front side panel 70 and a back side panel 72. The front side panel 70 includes the first side margin 50 which is refastenably attached to the side edges 30 of the absorbent chassis 28 in the front waist region 22 of the diaper 20. The back side panel 72 includes the second side

margin 52 which is permanently connected to the side edges 30 of the absorbent chassis 28 in the back waist region 24 of the diaper 20. In such a configuration, the laterally outward edge of the front side panel 70 is connected to the laterally outward edge of each back side panel 72 to provide a side seam 74 as illustrated in Fig. 2. Desirably, the laterally outward edges of the front and back side panels 70 and 72 are attached to each other along the side seam 74 using ultrasonic bonding for improved manufacturing efficiency and reduced raw material cost. Side panels 48 having such front and back side panels 70 and 72 provide improved manufacturability. In an alternative configuration, each side panel 48 may include a single piece of material which is folded over upon itself during manufacturing along a fold line located in a similar location to the side seam 74.

Materials suitable for the side panels 48 of the diaper 20 are generally known to those skilled in the art. For example, suitable materials for the side panels 48 include those materials described above as being suitable for the outer cover 42 or bodyside liner 44 of the absorbent chassis 28 of the diaper 20 such as woven and nonwoven materials or laminates of such materials. Desirably, the side panels 48 are elastic or stretchable to provide improved fit about the wearer. For example, the side panels 48 may comprise a stretch-thermal laminate (STL), neck-bonded laminate (NBL), or stretch-bonded laminate (SBL) material. Methods of making such materials are well known to those skilled in the art and described in U.S. Patent No. 4,663,220 issued May 5, 1987 to Wisneski et al., U.S. Patent No. 5,226,992 issued July 13, 1993 to Mormon, and European Patent Application No. EP 0 217 032 published on April 8, 1987 in the names of Taylor et al., the disclosures of which are hereby incorporated by reference. When made with elastic materials, the side panels 48 are desirably capable of elongating in the lateral direction from about 10 to about 400 percent, more desirably at least about 100 percent, even more desirably from about 100 to about 300 percent, and still yet more desirably from about 150 to about 250 percent for improved fit and performance. The stretchability of the side panels allows the side panels 48 to stretch over and around the hips of the wearer as the prefastened diaper is pulled on while still maintaining proper fit at the waist after the diaper is correctly positioned on the wearer.

Desirably, the side panels 48 are a neck-bonded laminate material for improved manufacturing due to its ability to stretch in the cross machine direction. For example, in a particular embodiment, the side panels 48 include a neck-bonded laminate material which includes a urethane film having a basis weight of about 15 grams per square meter and commercially available from Shawmut Mills, a business having offices in West

Bridgewater Massachusetts, under the trade designation SHAWMUT TX-1560 sandwiched between two layers of necked, stretched spunbond. Each spunbond layer has a basis weight of about 16 grams per square meter and is composed of 3.0 denier polypropylene fibers. The composite is laminated together with an adhesive spray at an add-on rate of about 0.3 grams per square meter. A suitable adhesive is available from Findley Adhesive under the trade designation FINDLEY 2525A. Such a neck-bonded laminate material is generally capable of elongating in the cross machine direction about 185 percent.

10 The absorbent article of the different aspects of the present invention further includes a prefastened, refastenable fastening system 60 for securing the absorbent article about the waist of the wearer. The fastening system 60 includes fasteners located on one of the waist regions 22 and 24 of the diaper 20 which are configured to releasably engage the opposite waist region of the diaper 20 to maintain the diaper about the waist of the
15 wearer. The use of fasteners which are refastenable or releasably engageable allows for ease of securing and removing the diaper 20 from the waist of the wearer without undesirably soiling the wearer. The use of refastenable fasteners further readily allows for the inspection of the inside of the diaper 20 to determine if it has been soiled with the ability to refasten if it is not soiled.

20 As representatively illustrated in Figs. 1-3, the prefastened, refastenable fastening system 60 of the present invention includes a pair of primary fasteners 62, one located on each of the side panels 48 of the diaper 20, which are refastenably engaged with the absorbent chassis 28 along the opposed side edges 30 of the absorbent chassis 28. The fastening
25 system 60 may also include releasable bonds 64 which assist the primary fasteners 62 in releasably securing the side panels 48 to the absorbent chassis 28. When the primary fasteners 62 are refastenably engaged, the side edges 30 of the absorbent chassis 28 and edges of the side panels 48 define leg openings which are configured to encircle the legs of the wearer and the waist edges 32 of the absorbent chassis 28 and the edges of
30 the side panels 48 opposite those defining the leg openings define a waist opening which is configured to encircle the waist of the wearer.

In the illustrated embodiments, the primary fasteners 62 are adhered to the first side margins 50 of the side panels 48 and are refastenably engaged with the exterior
35 surface 36 of the absorbent chassis 28 along the side edges 30 of the absorbent chassis 28 in the front waist region 22 of the diaper 20. The location of the primary

fasteners 62 along the side margins 50 of the side panels 48 as opposed to being located along the side seam 74 between the front and back panels 70 and 72 provides the caregiver improved access to the primary fasteners 62 as the fasteners will be located towards the front of the wearer. Desirably, the outboard edges of the primary fasteners 62 are located inward from the side seam 74 or the laterally outboard edge of the article a distance of at least about 1.9 centimeters and more desirably at least about 3.8 centimeters to provide such improved access.

In such a configuration, the side panels 48 are permanently connected to the side edges 30 of the absorbent chassis 28 in the back waist region 24 of the diaper 20 and refastenably attached to the side edges 30 of the absorbent chassis 28 in the front waist region 22 via the primary fasteners 62. Alternatively, as discussed above, the side panels 48 may be permanently connected to the side edges 30 of the absorbent chassis 28 in the front waist region 22 and the primary fasteners 62 on the side panels 48 may be refastenably engaged to the exterior surface 36 of the absorbent chassis 28 to the side edges 30 of the absorbent chassis 28 in the back waist region 24 of the diaper 20. The primary fasteners 62 may be adhered to the side panels 48 by any means known to those skilled in the art such as adhesive bonds, sonic bonds or thermal bonds.

Desirably, the primary fasteners 62 are refastenably engaged directly with the outer surface of the outer cover 42 of the absorbent chassis 28 of the diaper 20 to provide improved fit and ease of fastening. Alternatively, as representatively illustrated in Fig. 3, the disposable diaper 20 of the present invention may further include an attachment panel 66 located on the outer cover 42 in one of the waist regions 22 and 24 of the diaper 20. In such a configuration, the primary fasteners 62 are refastenably engaged with the attachment panel 66 to maintain the diaper 20 about the waist of the wearer. The attachment panel 66 may include two separate panels located along the opposed side edges of the absorbent chassis 28 in one of the waist regions 22 and 24 of the diaper 20. Alternatively, the attachment panel 66 may include a single piece of material which extends substantially across the respective waist region of the diaper 20.

In the different aspects of the present invention, the primary fasteners 62 are refastenably engaged with the outer surface of the opposite waist region 22 and 24 of the diaper 20 before the diaper 20 is placed on the wearer to provide a prefasted, refastenable, pant-like disposable diaper. In such a configuration, the pant-like, refastenable diaper 20 can be pulled on or off over the legs and hips of the wearer. If the pant-like diaper 20

becomes soiled during use, the primary fasteners 62 can be disengaged to easily remove the diaper 20 from the waist of the wearer with reduced risk of undesirably soiling the clothes or legs of the wearer. The primary fasteners 62 can also be easily disengaged to inspect the diaper 20 for possible soiling or to first apply the product to the wearer if
5 desired. Thus, the diaper 20 is configured to be pulled on or off over the hips of the wearer such as conventional training pants and can be readily applied or removed by disengaging the fasteners similar to conventional diaper articles. Moreover, the primary fasteners 62 can be repositioned if necessary after the prefastened diaper 20 has been pulled on over the legs and hips of the wearer to adjust the fit of the diaper to the wearer.

10 Suitable fasteners are well known to those skilled in the art and can include adhesive tape tab fasteners, hook and loop fasteners, mushroom fasteners, snaps, pins, belts and the like, and combinations thereof. For example, as representatively illustrated in Fig. 3, the primary fasteners 62 may be hook type fasteners and the outer cover 42 or attachment
15 panel 66 may be configured to function as a complimentary loop type fastener. Desirably, the primary fasteners 62 are hook type fasteners which are refastenably engageable directly with the outer cover 42. Such an arrangement provides the ability to vary the size of the waist opening in very small increments over a wide range to fit the waist of the wearer.

20 The pant-like, refastenable disposable absorbent article of the present invention may further include releasable bonds 64 for improved reliability of maintaining the article in the prefastened condition particularly when it is being pulled on or off over the hips of the wearer. Absorbent articles including such releasable bonds and methods of making such
25 are further described in U.S. Patent Application entitled "DISPOSABLE ABSORBENT ARTICLES HAVING PASSIVE SIDE BONDS AND ADJUSTABLE FASTENING SYSTEMS" filed in the name of Elsberg on June 19, 1998 and assigned U.S. Serial No. 09/100,574, and U.S. Patent Application entitled "METHOD OF MAKING AN ABSORBENT ARTICLE WITH PREFASTENED SIDE PANELS AND ABSORBENT
30 ARTICLES MADE BY THE SAME" filed in the name of McNichols on June 19, 1998 and assigned U.S. Serial No. 09/100,825, the disclosures of which are hereby incorporated by reference.

For example, as representatively illustrated in Figs. 1-3, the pant-like diaper 20 may
35 include a pair of releasable bonds 64 which releasably connect the side panels 48 to the front waist region 22 of the diaper 20. In such a configuration, the releasable bonds 64

assist the fastening system 60 and, in particular, the primary fasteners 62 in maintaining the diaper 20 in a prefastened condition as the diaper 20 is pulled up or down over the hips of the wearer. Moreover, the releasable bonds 64 assist the primary fasteners 62 in preventing movement and shifting of the waist regions 22 and 24 and side panels 48 relative to each other for improved fit and performance. The releasable bonds 64 also provide improved hip coverage and prevent rollover or folding of the side edges 30 and waist edges 32 of the absorbent chassis 28 of the prefastened diaper 20 as it is pulled over the wearers hips. Such prevention of rollovers and foldovers can reduce the level of contact between the fasteners and the skin of the wearer which can desirably result in reduced skin irritation and redness.

As shown in Fig. 3, the releasable bonds 64 may be located longitudinally adjacent to the primary fasteners 62 on the first side margins 50 of the side panels 48 in the front waist region 22 of the diaper 20. In such a configuration, the releasable bonds 64 connect the side margins 50 of the side panels 48 to the side edges 30 of the absorbent chassis 28 of the diaper 20. The releasable side bonds 64 may be located on the side margins 50 in any manner which provides the desired improved fastening.

In the illustrated embodiments, the releasable bonds 64 connect the respective side panel 48 and side edge 30 of the absorbent chassis 28 in the front waist region 22 in a facing relationship. The releasable bonds 64 can be provided by any type of bonding such as thermal, adhesive and ultrasonic bonding as are well known to those skilled in the art and may be discrete point bonds, dashed lines, continuous lines, discontinuous lines and the like or combinations thereof. Moreover, the releasable bonds 64 may have any shape such as circular, square, triangular and the like. Desirably, the releasable bonds 64 are ultrasonic point bonds for improved manufacturing efficiency. In such a configuration, the ultrasonic releasable bonds 64 will be destroyed upon the first opening of the pant-like diaper 20.

In certain aspects of the invention, the location of the releasable bonds 64 and the respective primary fasteners 62 can be selectively varied to tailor the fit of the diaper 20 for different sized wearers. For example, the location of the primary fasteners 62 and releasable bonds 64 may be varied during the manufacturing process such that the same process can produce prefastened, refastenable, pant-like diapers suitable for a range of sizes which can encompass several conventional sized diapers.

The releasable bonds 64 are configured to assist the primary fasteners 62 in maintaining the diaper 20 in a prefastened configuration as the diaper 20 is pulled on and off over the hips of the wearer and during use. Thus, it is desirable that the releasable bonds 64 provide adequate shear strength for assisting the primary fasteners 62. For example, in a particular embodiment, the releasable bonds 64 define a shear strength of at least about 50 grams and desirably at least about 100 grams. For example, the releasable bonds 64 may define a shear strength of from about 100 to about 4000 grams and desirably from about 500 to about 2000 grams. As used herein, the term "shear strength" refers to the value obtained when subjecting the side bonds to the Shear Strength Test described herein. Shear strength values less than those described above may not prevent the separation of the respective waist region 22 and 24 and side panel 48 from each other during the application and use of the diaper 20.

The releasable bonds 64 are also configured to be readily broken such that the caregiver can easily peelingly disengage the side panels to remove the diaper 20 from the wearer after it has been soiled, to inspect the diaper for soiling or to initially position the diaper 20 on the wearer if desired. Thus, it is desirable that the releasable bonds 64 define a relatively low peel strength such that the caregiver can readily disengage the primary fasteners 62 and break the releasable bonds 64 to separate the waist region 22 or 24 from the side panels 48 to remove the diaper 20 from the waist of the wearer similar to conventional diapers which are not prefastened. For example, in a particular embodiment, the releasable bonds 64 define a peel strength of no more than about 1500, desirably no more than about 1000 grams and more desirably no more than about 800 grams. As used herein, the term "peel strength" refers to the value obtained when subjecting the side bonds to the Peel Strength Test described herein. Peel strength values greater than those described above may not be readily breakable and may undesirably result in tearing of other portions of the diaper 20.

The different aspects of the present invention advantageously provide pant-like, refastenable disposable absorbent articles which can include the combination of releasable bonds and refastenable fasteners. The fasteners are prefastened to refastenably engage the side panels 48 with the front and back waist portions to allow the absorbent article to be pulled up or down over the hips of the wearer such as conventional training pants. Moreover, the fastening system can be used to refastenably engage and adjust the front and back waist portions of the absorbent article to maintain the absorbent article about the waist of the wearer after the article has been pulled on in a similar

manner to conventional diapers. The releasable bonds assist the fastening system in maintaining the article in a prefastened condition as the article is pulled up or down over the hips of the wearer. Moreover, the fastening system prevent movement and shifting of the waist portions relative to each other for improved manufacturability, fit and
5 performance. The fastening system also prevent the rollover or folding in of the side and waist edges of the prefastened absorbent article as it is pulled over the wearers hips.

As a result, the absorbent articles of the present invention are designed to conform to the body of the wearer to effectively contain bodily exudates while still being capable of being
10 reliably pulled up or down over the hips of the wearer to assist in the toilet training of the wearer. Moreover, similar to conventional diapers, the absorbent articles of the present invention can advantageously be applied to and removed from the wearer with relative ease and cleanliness.

15 The methods of the different aspects of the present invention are directed at reliably and consistently providing the pant-like, refastenable disposable absorbent articles described herein such as that representatively illustrated in Figs. 1-3. For example, as representatively illustrated in Fig. 4, the methods can include providing a continuous web of interconnected absorbent chassis 80 moving in the direction indicated by the arrow
20 associated therewith. In such a configuration, the front waist region of the leading chassis may be connected to the back waist region of the trailing chassis to form the continuous web of interconnected absorbent chassis 80. Alternatively, the back waist region of the leading chassis may be connected to the front waist region of the trailing chassis or the chassis may be arranged in a front-to-front/back-to-back relationship.

25 The continuous web of interconnected absorbent chassis 80 may be provided by means known to those skilled in the art. For example, a web of interconnected absorbent chassis 80, such as the absorbent chassis 28 illustrated in Fig. 3, may be provided by intermittently placing individual absorbent cores 46 between a continuously moving web of
30 outer cover material and a continuously moving web of bodyside liner material at spaced apart locations. Additional components, such as the leg elastics 54, containment flaps 56 and waist elastics 58, may also be connected to the continuously moving web of interconnected absorbent chassis 80. The different components of the diaper 20 may be
35 adhesive, thermal or ultrasonic bonding. Desirably, most of the components are

connected using ultrasonic bonding for improved manufacturing efficiency and reduced raw material cost.

- As illustrated in Fig. 4, a pair of laterally opposed side panels 48 having primary fasteners 62 attached thereto are also attached to the side edges of the continuously moving web of interconnected absorbent chassis 80. In such a configuration, the primary fasteners 62 may be refastenably engaged with the outer surface of the absorbent chassis 28 of each diaper. For example, as representatively illustrated in Figs. 1 and 2, the primary fasteners 62 located on the side margins 50 of each of the side panels 48 may be refastenably engaged with the outer surface 36 of the absorbent chassis 28 of the diaper 20 in the front waist region 22 of the diaper 20. Alternatively, the primary fasteners 62 located on the side margins 50 of each of the side panels 48 may be refastenably engaged with the outer surface 36 of the absorbent chassis 28 of the diaper 20 in the back waist region 24. As discussed above, each diaper 20 may include an attachment panel 66 located on the outer cover 42 to which the primary fasteners 62 are refastenably engaged. Alternatively, the primary fasteners 62 may refastenably engage the outer cover 42 of the absorbent chassis 28 of the diaper 20 directly without requiring a separate fastening panel.
- The laterally opposed side panels 48 may be supplied by means known to those skilled in the art. For example, as illustrated in Fig. 4, a roll of side panel material 82 may be unwound and cut by slitter 84 to provide two webs of spaced apart, interconnected side panels 86. As illustrated, the primary fasteners 62 can be provided by unwinding a roll of fastener material 88, passing the web of fastener material through a die cutter 90 which selectively cuts the web of fastener material into two webs of spaced apart, fastener material. The individual primary fasteners 62 may then be provided by passing the webs of fastener material through the slip cutter 92 and bonder 94 which intermittently cut the respective webs of fastener material into discrete primary fasteners 62 and bond the primary fasteners 62 to the side margins of the webs of interconnected side panels 86 at spaced apart locations. The slip cutter 92 provides the spacing between the primary fasteners 62 by transferring the individual fasteners away from the slip cutter 92 at a higher speed than the speed at which the webs of fastener material are provided to the slip cutter 92.
- Suitable bonding equipment which can be used to provide bonder 94 is well known to those skilled in the art. Desirably, the bonder is an ultrasonic bonder for improved

efficiency and cost effectiveness. For example, as illustrated in Fig. 4, the bonder 94 may include the combination of one or more rotary ultrasonic horns 96 and an anvil roll 98 between which the webs to be bonded are passed to provide the bonds. Suitable rotary ultrasonic horns are described in U.S. Patent No. 5,110,403 to Ehlert, the disclosure of which is hereby incorporated by reference. Such rotary ultrasonic horns 96 generally have a diameter of from about 5 to about 20 centimeters and a width of from about 2 to about 15 centimeters. Alternatively, the ultrasonic horn 96 may be a stationary ultrasonic horn as are also known to those skilled in the art. Other suitable ultrasonic horns and ultrasonic bonders are commercially available from Branson Sonic Power Company, a business having offices in Danbury, Connecticut. The bonder 94 could otherwise be a thermal or adhesive bonder as are known to those skilled in the art.

The bonder 94 may be configured to provide the desired bonds in a variety of patterns and shapes or sizes. For example, the bonds may be provided as a pattern of points, dots, circles, squares, triangles and the like which may be arranged in a linear or nonlinear configuration. In the illustrated embodiments, such patterns may be located on the bonding horn 96 or the anvil roll 98. Desirably, the pattern is located on the anvil roll 98 for improved manufacturing efficiency.

The webs of interconnected side panels 86 with the primary fasteners 62 intermittently attached thereto may then pass through a cutter 100 and bonder 102 which cut the respective webs of interconnected side panels 86 into discrete panels and intermittently bond the discrete panels to the side edges of the web of interconnected absorbent chassis 80 at spaced apart locations. As illustrated in Figs. 3 and 4, a portion of each panel is permanently bonded to the side edges of the web of absorbent chassis 80 by bonder 102 to provide the permanent joint 76. In the illustrated embodiments the permanently bonded portions include that portion of the panel which will be located in the back waist region 24 of the diaper 20.

The primary fasteners 62 on the opposite portion of each discrete panel 48 are refastenably engaged with the outer surface 36 of each absorbent chassis 28 on the web 80 to provide the refastenable joint 78 as illustrated in Fig. 3. The refastenable engagement of the primary fasteners 62 with the outer surface 36 of each absorbent chassis 28 on the web of interconnected absorbent chassis 80 may be ensured by passing the primary fasteners 62 and web 80 between a pair of rotating nip rolls (not shown) which apply pressure between the primary fasteners 62 and outer surface 36.

The refastenable portions of the panels may also be releasably bonded to the side edges of the web of absorbent chassis 80 along the refastenable joint 78 as illustrated in Fig. 3. In the illustrated embodiments, the releasable bonds 64 assist the primary fasteners 62 in
5 maintaining the side panels 48 refastenablely attached to the absorbent chassis 28 of the diaper 20 in the front waist region 22 of the diaper 20. Such releasable bonds 64 may also be provided by passing the web of interconnected absorbent chassis 80 through bonder 102, as illustrated in Fig. 4. For example, bonder 102 may be configured to releasably bond the portion of the panels longitudinally adjacent the primary fasteners 62
10 to the side edges 30 of the absorbent chassis 28 of each diaper 20 in the front waist region 22 at releasable bonds 64, as representatively illustrated in Fig. 3.

The term "releasably bond" as used herein refers to a bond which has a relatively low peel strength such that the bond can be broken by the caregiver if desired to assist in
15 inspecting or removing the diaper 20 from the wearer without tearing or severely damaging the other portions of the diaper 20. The releasable bonds may otherwise be broken prior to applying the diaper 20 to the wearer if it is desired to apply the pant-like, refastenable diaper of the present invention in a similar manner to conventional diapers. The specific values of the desired peel strength of the releasable bonds are set forth
20 herein in conjunction with the detailed description of the diaper 20 illustrated in Figs. 1-3.

The continuous web of interconnected absorbent chassis 80 having the panels attached thereto is then passed through cutter 104 which selectively cuts the web 80 into discrete, individual diapers 20. Such cutters are generally known to those skilled in the art and may
25 include, for example, the combination of a cutting roll 106 and anvil roll 108 through which the web 80 travels. The anvil roll 108 may include a hardened steel rotating roll while the cutting roll 106 may include one or more flexible hardened steel blades clamped on to another rotating roll. The pinching force between the blade on the cutting roll and the anvil roll creates the cut. The cutting roll 106 may have one or more blades depending
30 upon the desired distance between the cuts.

The discrete diapers 20 are then folded in a conventional blade folder 110 about a fold line through the crotch region 26 of the diaper 20. As such, the waist regions 22 and 24 of each diaper are positioned in a facing relationship with the edges of the panels in each
35 waist region extending laterally outward beyond the side edges 30 of the absorbent chassis 28 as illustrated in Figs. 3 and 4. The fold line extends in a lateral direction

through the crotch region 26 of the diaper 20. Desirably, each diaper 20 is consistently folded about fold line such that the waist edges 32 of the diaper 20 in the front and back waist region 22 and 24 align with each other.

5 Suitable blade folders to provide the folding are well known to those skilled in the art. For example, as illustrated in Fig. 4, the blade folder 110 may include a pair of rotating folding blades 112 which are configured to contact the diaper 20 along the fold line. In such a configuration, the rotation of the folding blades 112 forces the diaper into a nip between two rotating rolls causing the diaper 20 to fold about the fold line.

10

As illustrated in Fig. 4, the waist regions 22 and 24 are maintained in the facing relationship by passing the diaper 20 through another bonder 114 which may be similar to bonders 94 and 102. The illustrated bonder 114 permanently bonds and secures the front and back panels 70 and 72 of each side panel 48 to each other along side seam 74 as illustrated in Figs. 1-3 to provide the pant-like diaper 20 of the present invention.

15

Desirably, the bond pattern used along side seam 74 is continuous for improved strength. Alternatively, if one single piece of material is being used for each side panel 48, the free edges of the side panels 48 may be folded over and bonded by a bonder to the opposite side edge 30 of the absorbent chassis. Desirably, the bonder 114 is also an ultrasonic bonder for improved efficiency and cost effectiveness. Suitable bonders for permanently bonding and securing the panels together or to the absorbent chassis 28 are described above as being suitable for bonder 94. Suitable bond patterns are also described above.

20

In an alternative method not illustrated, one surface of the primary fasteners 62 may first be refastenably engaged with the side edges of each absorbent chassis on the web of interconnected absorbent chassis 80. The discrete panels cut from the webs of interconnected side panels 86 may then be permanently attached to the opposite surface of the primary fasteners 62 either before or after each diaper is folded depending on whether the side panels 48 are made from a single piece of material or separate pieces such as front and back panels 70 and 72. Such a process may be particularly desirable if the material being used for the individual side panels is a machine direction stretchable material which must be rotated before being applied such as a stretch bonded laminate.

25

30

The methods of the present invention, as representatively illustrated in Fig. 4, can reliably and consistently provide pant-like, refastenable absorbent articles having separate and distinct side panels such as the diaper illustrated in Figs. 1-3.

35

Peel Strength Test

- This test method is designed to quantify, in grams, the peak strength of the releasable bonds assisting the fasteners in refastenably engaging the side panels to the front waist region of the absorbent article. The direction of removal (peel), in this application, is that direction in which the fastener material would generally be removed from a substrate when the product is in use. This direction is generally perpendicular to a longitudinal centerline of the product.

10 Equipment

1. Tensile tester capable of obtaining a peak load and equipped with an appropriate load cell. A suitable tensile testing system is a Sintech Tensile Tester, commercially available from MTS Sintech, Research Triangle Park, North Carolina, under the trade designation Instron Model 4201 Tensile Tester with Sintech QAD (Quality Assurance Department) Software.
- 15 2. Software commercially obtained from MTS Sintech under the trade designation Sintech Testworks™.
3. Pneumatic-action grips commercially available from Instron Corporation, Canton, Massachusetts, under the trade designation "Instron Model 2712-004."
- 20 4. 1 by 4 inch grip faces, serrated, commercially available from Instron Corporation, Canton, Massachusetts.
5. Test facility having a temperature of $23 \pm 1^\circ\text{C}$, and a relative humidity of 50 ± 2 percent.

25 Test Procedure

1. A sample to be tested is conditioned in the test facility for at least 4 hours prior to testing.
2. The load cell is calibrated and the software loaded.
3. The grips are installed on the tensile tester with the jaws closed.
- 30 4. The test condition for the tensile tester are set as follows:
Crosshead speed: 500 millimeters/minute
Full-scale load: 5 kilograms
Threshold: 5 percent
Fail criterion: 95 percent
35 Gage length: 50 millimeters
5. The weight of the clamp is tared out.

6. The primary fastener tab of the fastening element on the side panel of the article is inserted into the upper jaw such that the edge of the grip face is flush with the inner edge of the hook material.
7. The front waist region of the article is inserted into the lower jaw such that the inner surface of the side panel and the outer surface of the front waist region form a 180° angle. The lower jaw is closed.
8. The crosshead is started in motion.
9. The peak load of failure is recorded. It is intended that the mode of failure is that the side panel of the diaper separates from the front waist region of the diaper.
10. Results are rejected if the place of failure is any location other than adjacent the releasable bonds.

Shear Strength Test

- This test method is designed to quantify, in grams, the peak dynamic shear strength of the releasable bonds assisting the primary fasteners in refastenably engaging the side panels to the front waist region of the absorbent article. The direction of force in this application is generally perpendicular to the longitudinal centerline of the product.

Equipment

1. Tensile tester capable of obtaining a peak load and equipped with an appropriate load cell. A suitable tensile testing system is a Sintech Tensile Tester, commercially available from MTS Sintech, Research Triangle Park, North Carolina, under the trade designation Instron Model 4201 Tensile Tester with Sintech QAD (Quality Assurance Department) Software.
2. Software commercially obtained from MTS Sintech under the trade designation Sintech Testworks™.
3. Pneumatic-action grips commercially available from Instron Corporation, Canton, Massachusetts, under the trade designation "Instron Model 2712-004."
4. 1 by 4 inch grip faces, serrated, commercially available from Instron Corporation, Canton, Massachusetts.
5. Test facility having a temperature of $23 \pm 1^\circ\text{C}$, and a relative humidity of 50 ± 2 percent.

Test Procedure

1. A sample to be tested is conditioned in the test facility for at least 4 hours prior to testing.
2. The load cell is calibrated and the software loaded.
- 5 3. The grips are installed on the tensile tester with the jaws closed.
4. The test condition for the tensile tester are set as follows:
Crosshead speed: 500 millimeters/minute
Full-scale load: 5 kilograms
Threshold: 5 percent
10 Fail criterion: 95 percent
Gage length: 50 millimeters
5. The weight of the clamp is tared out.
6. The primary fastener tab of the fastening element on the side panel of the article is inserted into the upper jaw such that the edge of the grip face is flush with the inner
15 edge of the hook material.
7. The front waist region of the article is inserted into the lower jaw such that the inner surface of the side panel and the inner surface of the front waist region are facing the same direction and are parallel to one another. The lower jaw is closed.
8. The crosshead is started in motion.
- 20 9. The peak load of failure is recorded. It is intended that the mode of failure is that the side panel of the article separates from the front waist region of the article. Results are rejected if the place of failure is any location other than the releasable bonds.
- 25 While the invention has been described in detail with respect to specific aspects thereof, it will be appreciated that those skilled in the art, upon attaining an understanding of the foregoing, may readily conceive of alterations to, variations of and equivalents to these aspects. Accordingly, the scope of the present invention should be assessed as that of the appended claims and any equivalents thereto.

We claim:

1. A pant-like, refastenable, disposable absorbent article which defines a front waist region, a back waist region, a crotch region which extends between and connects said waist regions, a longitudinal direction and a lateral direction, said absorbent article comprising:
 - 5 a) an absorbent chassis which defines an exterior surface, an interior surface opposite said exterior surface, a pair of laterally opposed side edges and a pair of longitudinally opposed waist edges; and
 - b) a pair of opposed side panels which extend outward from and between said side edges of said absorbent chassis in said front waist region and said back waist region
 - 10 of said absorbent article to define a waist opening and a pair of leg openings in said pant-like disposable absorbent article, wherein each of said opposed side panels defines a first side margin which is permanently attached to said side edge of said absorbent chassis in one of said front waist region or said back waist region of said absorbent article to provide a permanent joint and a second side margin which is refastenably attached to said side
 - 15 edge of said absorbent chassis in said other waist region of said absorbent article to provide a refastenable joint.
2. The absorbent article of claim 1 wherein said absorbent chassis comprises:
 - a) an outer cover;
 - b) a bodyside liner which is connected to said outer cover in a superposed relation;
 - and
 - 5 c) an absorbent core disposed between said outer cover and said bodyside liner.
3. The absorbent article of claim 1 and further comprising a fastener located on each of said second side margins of said side panels which is refastenably engaged with said exterior surface of said absorbent chassis in said other waist region to provide said refastenable joint.
4. The absorbent article of claim 3 wherein said fasteners are hook and loop type fasteners.
5. The absorbent article of claim 3 and further comprising at least one attachment panel which is located on said exterior surface of said absorbent chassis wherein said fasteners are refastenably engaged to said attachment panel.

6. The absorbent article of claim 3 wherein said absorbent chassis includes an outer cover which provides said exterior surface of said absorbent chassis and wherein said fasteners are refastenably engaged directly to said outer cover of said absorbent chassis.
7. The absorbent article of claim 1 wherein said second side margins of said side panels are refastenably attached to said side edges of said absorbent chassis in said front waist region of said absorbent article to provide said refastenable joints and wherein said first side margins of said side panels are ultrasonically bonded to said side edges of said absorbent chassis in said back waist region to provide said permanent joints.
8. The absorbent article of claim 1 wherein said side panels are a neck-bonded laminate material.
9. A pant-like, refastenable, disposable absorbent article which defines a front waist region, a back waist region, a crotch region which extends between and connects said waist regions, a longitudinal direction and a lateral direction, said absorbent article comprising:
- 5 a) an absorbent chassis which defines an exterior surface, an interior surface opposite said exterior surface, a pair of laterally opposed side edges and a pair of longitudinally opposed waist edges; and
- b) a pair of opposed back panels which are permanently attached to said side edge of said absorbent chassis in said back waist region of said absorbent article; and
- 10 c) a pair of opposed front panels which are refastenably attached to said side edge of said absorbent chassis in said front waist region of said absorbent article to provide a refastenable joint wherein said front panel and said back panel on each side edge of said absorbent chassis are connected together along a side seam to define a waist opening and a pair of leg openings and provide said pant-like, refastenable, disposable absorbent
- 15 article.
10. The absorbent article of claim 9 wherein each of said side seams defines a lateral outboard edge of said article.
11. The absorbent article of claim 9 and further comprising a fastener located on each of said front panels which is refastenably engaged with said exterior surface of said absorbent chassis in said front waist region to provide said refastenable joint.

12. The absorbent article of claim 11 wherein said fasteners are hook and loop type fasteners.

13. The absorbent article of claim 11 and further comprising at least one attachment panel which is located on said exterior surface of said absorbent chassis wherein said fasteners are refastenably engaged to said attachment panel.

14. The absorbent article of claim 11 wherein said absorbent chassis includes an outer cover which provides said exterior surface and wherein said fasteners are refastenably engaged directly to said outer cover.

15. A pant-like, refastenable, disposable absorbent article which defines a front waist region, a back waist region, a crotch region which extends between and connects said waist regions, a longitudinal direction and a lateral direction, said absorbent article comprising:

5 a) an absorbent chassis which defines an exterior surface, an interior surface opposite said exterior surface, a pair of laterally opposed side edges and a pair of longitudinally opposed waist edges;

 b) a pair of opposed side panels which extend between said side edges of said absorbent chassis in said front waist region and said back waist region of said absorbent
10 article to define a waist opening and a pair of leg openings in said pant-like, refastenable, disposable absorbent article, wherein each of said opposed side panels defines a first side margin which is permanently attached to said side edge of said absorbent chassis in one of said front waist region or said back waist region of said absorbent article to provide a permanent joint and a second side margin which is refastenably attached to said side
15 edge of said absorbent chassis in said other waist region of said absorbent article to provide a refastenable joint;

 c) a fastener located on said second side margin of each of said side panels which is releasably engaged with said exterior surface of said absorbent chassis in said other waist region to provide said refastenable joint; and

20 d) a releasable bond located on each of said second side margins which releasably bonds said second side margins of said side panels to said side edges of said absorbent chassis in said other waist region to assist in maintaining said pant-like, disposable absorbent article in a prefastened condition.

16. The absorbent article of claim 15 wherein said absorbent chassis comprises:
a) an outer cover;
b) a bodyside liner which is connected to said outer cover in a superposed relation;
and
5 c) an absorbent core disposed between said outer cover and said bodyside liner.
17. The absorbent article of claim 15 wherein said fasteners are hook and loop type fasteners.
18. The absorbent article of claim 15 and further comprising at least one attachment panel which is located on said exterior surface of said absorbent chassis wherein said fasteners are refastenably engaged to said attachment panel.
19. The absorbent article of claim 16 wherein said fasteners are refastenably engaged directly to said outer cover of said absorbent chassis.
20. The absorbent article of claim 15 wherein said second side margins of said side panels are refastenably attached to said side edges of said absorbent chassis in said front waist region of said absorbent article to provide said refastenable joints.
21. The absorbent article of claim 15 wherein each of said side panels includes a front panel attached to said side edges of said absorbent chassis in said front waist region and a back panel attached to said side edges of said absorbent chassis in said back waist region, wherein said front panel and said back panel are connected together along a side
5 seam which extends between said waist opening and said leg opening to provide said pant-like, refastenable, disposable absorbent article.
22. The absorbent article of claim 21 wherein each of said side seams defines a lateral outboard edge of said article.
23. The absorbent article of claim 15 wherein said releasable bonds include at least one point bond.
24. The absorbent article of claim 15 wherein said releasable bonds are ultrasonic bonds.

25. The absorbent article of claim 15 wherein said releasable bonds define a peel strength of no more than about 1500 grams.

26. A pant-like, refastenable, disposable absorbent article which defines a front waist region, a back waist region, a crotch region which extends between and connects said waist regions, an absorbent chassis which defines a pair of opposed side edges and a pair of opposed waist edges, wherein said pant-like, disposable absorbent article is made by a process which comprises:

- a) providing a continuous web of interconnected absorbent chassis;
- b) permanently attaching a pair of laterally opposed back panels to said side edges of each of said absorbent chassis in one of said front waist region or said back waist region to provide a permanent joint;
- 10 c) refastenably attaching a pair of laterally opposed front panels to said side edges of each of said absorbent chassis in said opposite waist region of said absorbent article to provide a refastenable joint;
- d) selectively cutting said continuous web of interconnected absorbent chassis into discrete absorbent articles;
- 15 e) folding each of said discrete absorbent articles about a fold line extending in a lateral direction through said crotch region of said article thereby positioning said front panels and said back panels in a facing relationship; and
- f) connecting said front panels and said back panels together along a pair of laterally opposed side seams to define a waist opening and a pair of leg openings and
- 20 provide said pant-like, refastenable, disposable absorbent article.

27. The absorbent article of claim 26 wherein said refastenably attaching includes refastenably engaging a fastener located on side margins of said front panels to said exterior surface of each of said absorbent chassis in said other waist region to provide said refastenable joint.

28. The absorbent article of claim 27 wherein said fasteners are hook and loop type fasteners.

29. The absorbent article of claim 27 wherein said refastenably attaching includes ultrasonically bonding said side margins of said front panels to said side edges of said absorbent chassis in said other waist region to assist said fasteners in providing said refastenable joints.

1/4

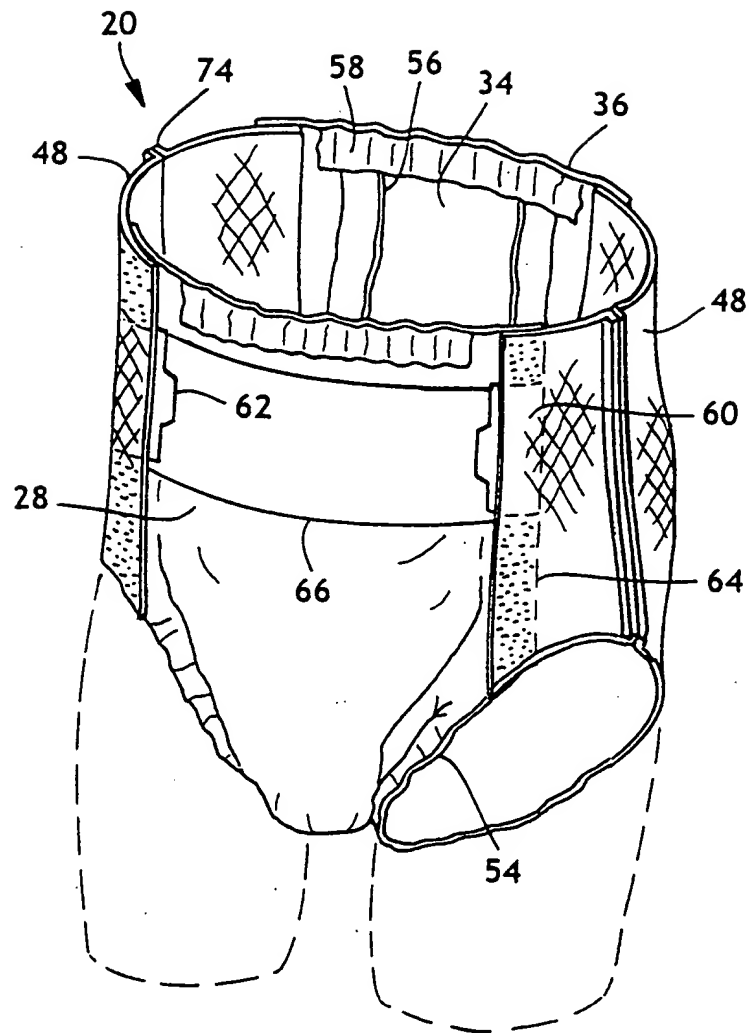


FIG. 1

2/4


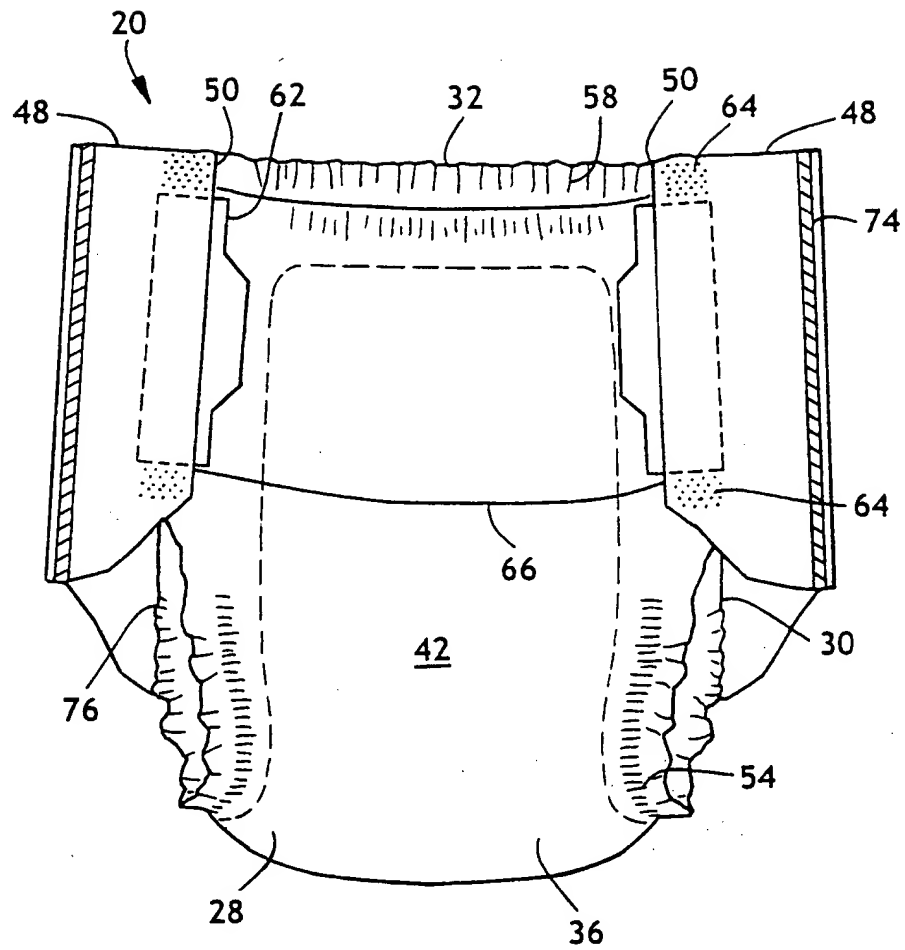


FIG. 2

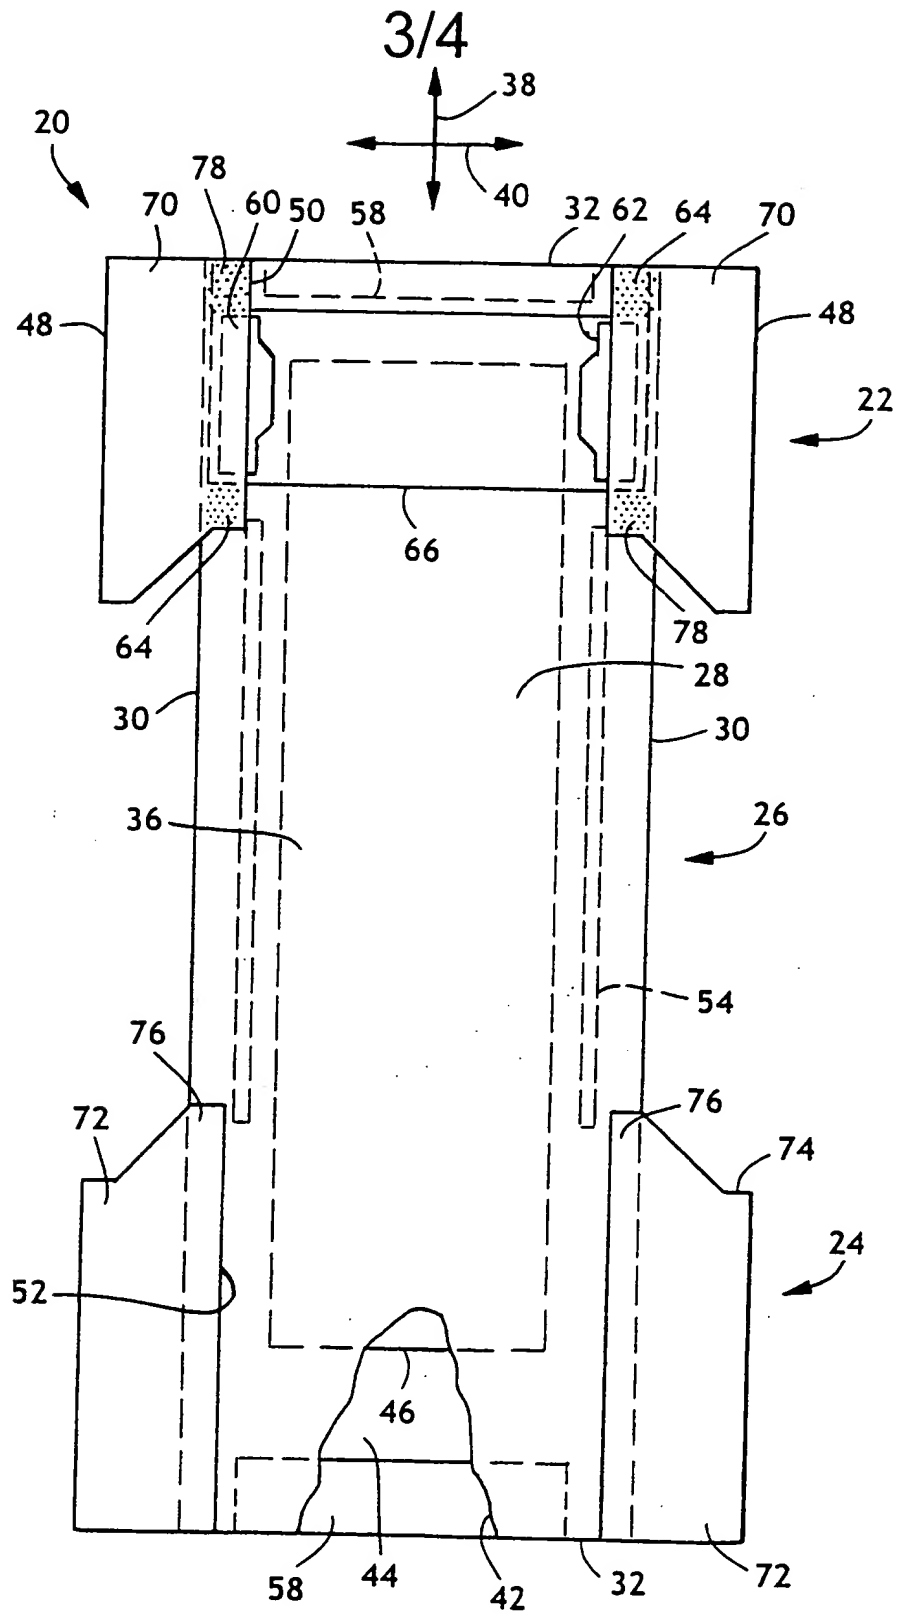

4/4

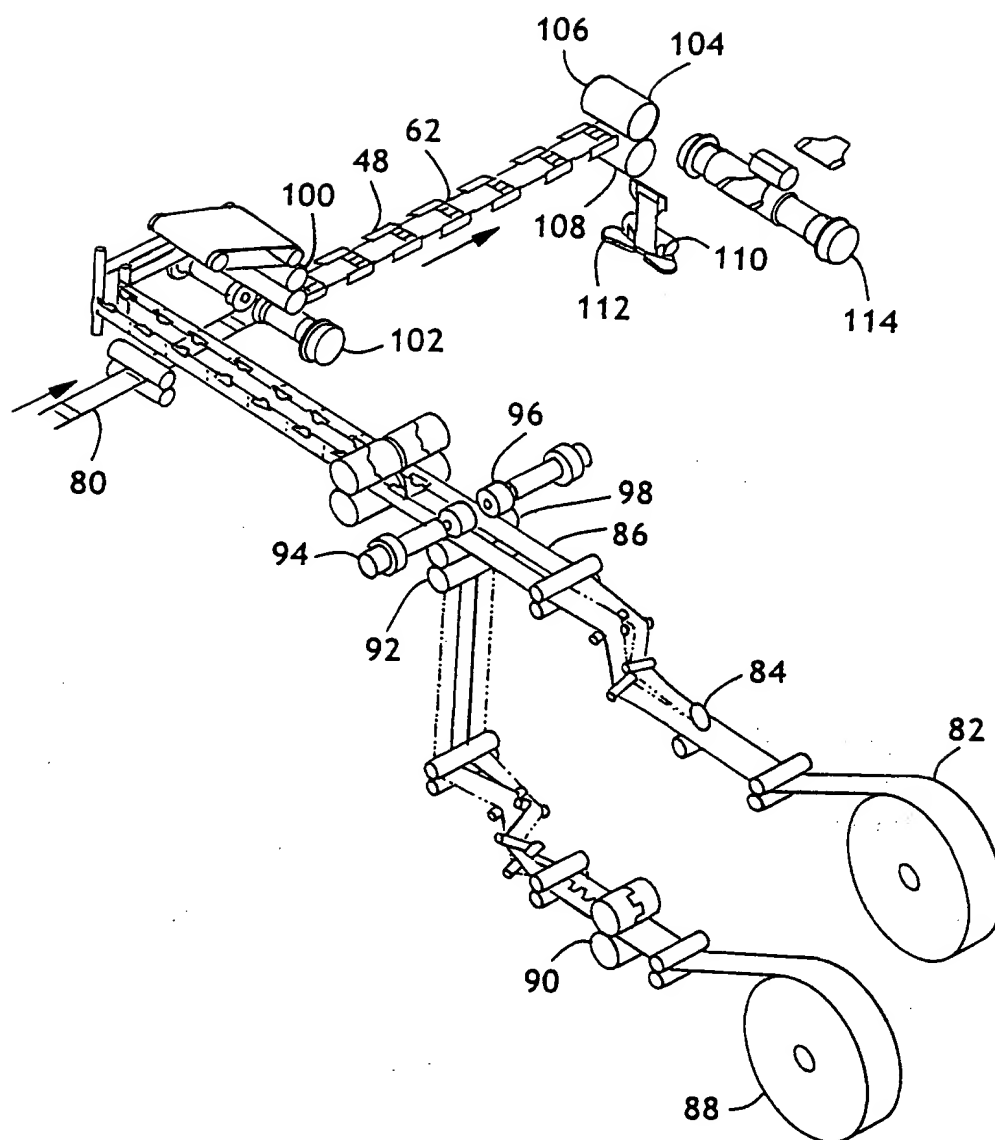


FIG. 4

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 99/29706

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61F13/15

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	GB 2 244 422 A (KAO CORP) 4 December 1991 (1991-12-04) page 7, paragraph 2 -page 10, paragraph 1 page 15, paragraph 3 -page 16, paragraph 1 page 20, paragraph 1; figures 1-11	1-8, 15-25 9-14, 26-29
X Y	WO 97 36566 A (PROCTER & GAMBLE) 9 October 1997 (1997-10-09) abstract page 24, paragraph 2 page 20, paragraph 2 -page 21, paragraph 1; figures 1-9	1-8 9-14, 26-29

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

19 April 2000

Date of mailing of the international search report

03/05/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 851 epo nl,
Fax: (+31-70) 340-3018

Authorized officer

Louter, P

INTERNATIONAL SEARCH REPORT

Intern 1st Application No

PCT/US 99/29706

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 570 980 A (UNI CHARM CORP) 24 November 1993 (1993-11-24)	1-8
Y		9-14, 26-29
A	abstract column 3, line 26 - line 56 column 5, line 34 -column 6, line 53; figures 1,4,5	15-25
Y	EP 0 597 331 A (KIMBERLY CLARK CO) 18 May 1994 (1994-05-18) page 4, line 10 - line 19 page 15, line 55 -page 16, line 38; figures 1-20	9-14, 26-29

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/29706

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 2244422 A	04-12-1991	JP 4035663 A	06-02-1992
		HK 105994 A	14-10-1994
		US 5370634 A	06-12-1994
WO 9736566 A	09-10-1997	US 5897545 A	27-04-1999
		AU 2334797 A	22-10-1997
		BR 9708519 A	03-08-1999
		CA 2251694 A	09-10-1997
		EP 0959855 A	01-12-1999
		JP 11507286 T	29-06-1999
		US 5957908 A	28-09-1999
EP 0570980 A	24-11-1993	JP 5317356 A	03-12-1993
		AU 3859093 A	25-11-1993
		CA 2096672 A,C	23-11-1993
		CN 2164272 U	11-05-1994
		DE 59306993 D	04-09-1997
		ES 2106227 T	01-11-1997
		GB 2267024 A,B	24-11-1993
		KR 137121 Y	20-03-1999
EP 0597331 A	18-05-1994	AT 105150 T	15-05-1994
		DE 8817215 U	14-07-1994
		AT 160280 T	15-12-1997
		AU 2698688 A	22-06-1989
		BR 8806698 A	29-08-1989
		CA 1326328 A	25-01-1994
		CA 1329864 A	31-05-1994
		CA 1338920 A	25-02-1997
		DE 3856073 D	02-01-1998
		DE 3856073 T	10-06-1998
		DE 3889435 D	09-06-1994
		DE 3889435 T	01-09-1994
		DE 8817217 U	11-08-1994
		EP 0320991 A	21-06-1989
		ES 2051825 T	01-07-1994
		ES 2108798 T	01-01-1998
		HK 1005058 A	18-12-1998
		JP 2004364 A	09-01-1990
		JP 2579679 B	05-02-1997
		KR 9308207 Y	13-12-1993
		KR 9308208 Y	13-12-1993
		KR 9308209 Y	13-12-1993
		US 4940464 A	10-07-1990
		ZA 8809174 A	27-12-1989
		BR 8806697 A	29-08-1989
		US 4938757 A	03-07-1990

THIS PAGE BLANK (USPTO)